



# HYBRID STEPPING MOTOR MOD.17HH512A-C

□ COLORS OF LEAD WIRES

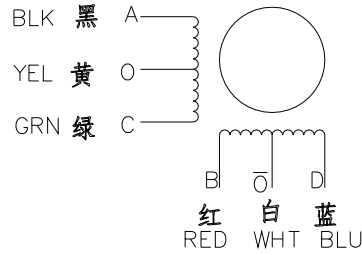


□ DIMENSIONS (unit=mm)

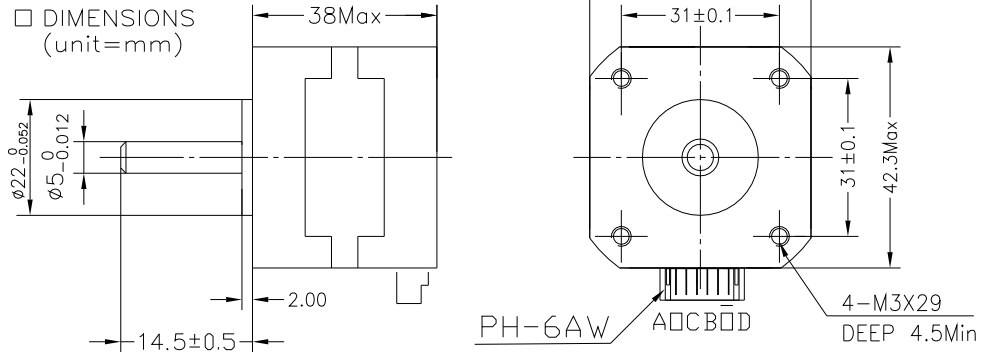

□ SPECIFICATIONS

PHASE	4	COMMENT
STEP ANGLE	1.8 °/STEP	Housing:PHR-6 Terminal: SPH-002T-P0.5S UL1007 AWG24 300 <sup>+0</sup>
VOLTAGE	5 V	
CURRENT	1.0 A/PHASE	
RESISTANCE	5.0±10% ohm/PHASE	
INDUCTANCE	4.0±20% mH/PHASE	
HOLDING TORQUE	2500 g.cm	
DETENT TORQUE	250 g.cm	
INSULATION CLASS	B	
LEAD STYLE	AWG24 UL 1007	
LIFE	6000 h	

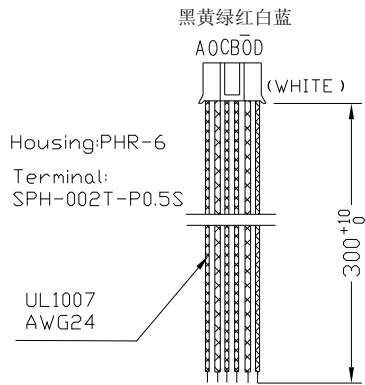

更改标记	数量	更改单号	签名	日期
设计		张永霞		2012.06.02
审核				
工艺				
批准				

17HH512A-C

技术条件

**Coact MOTOR**